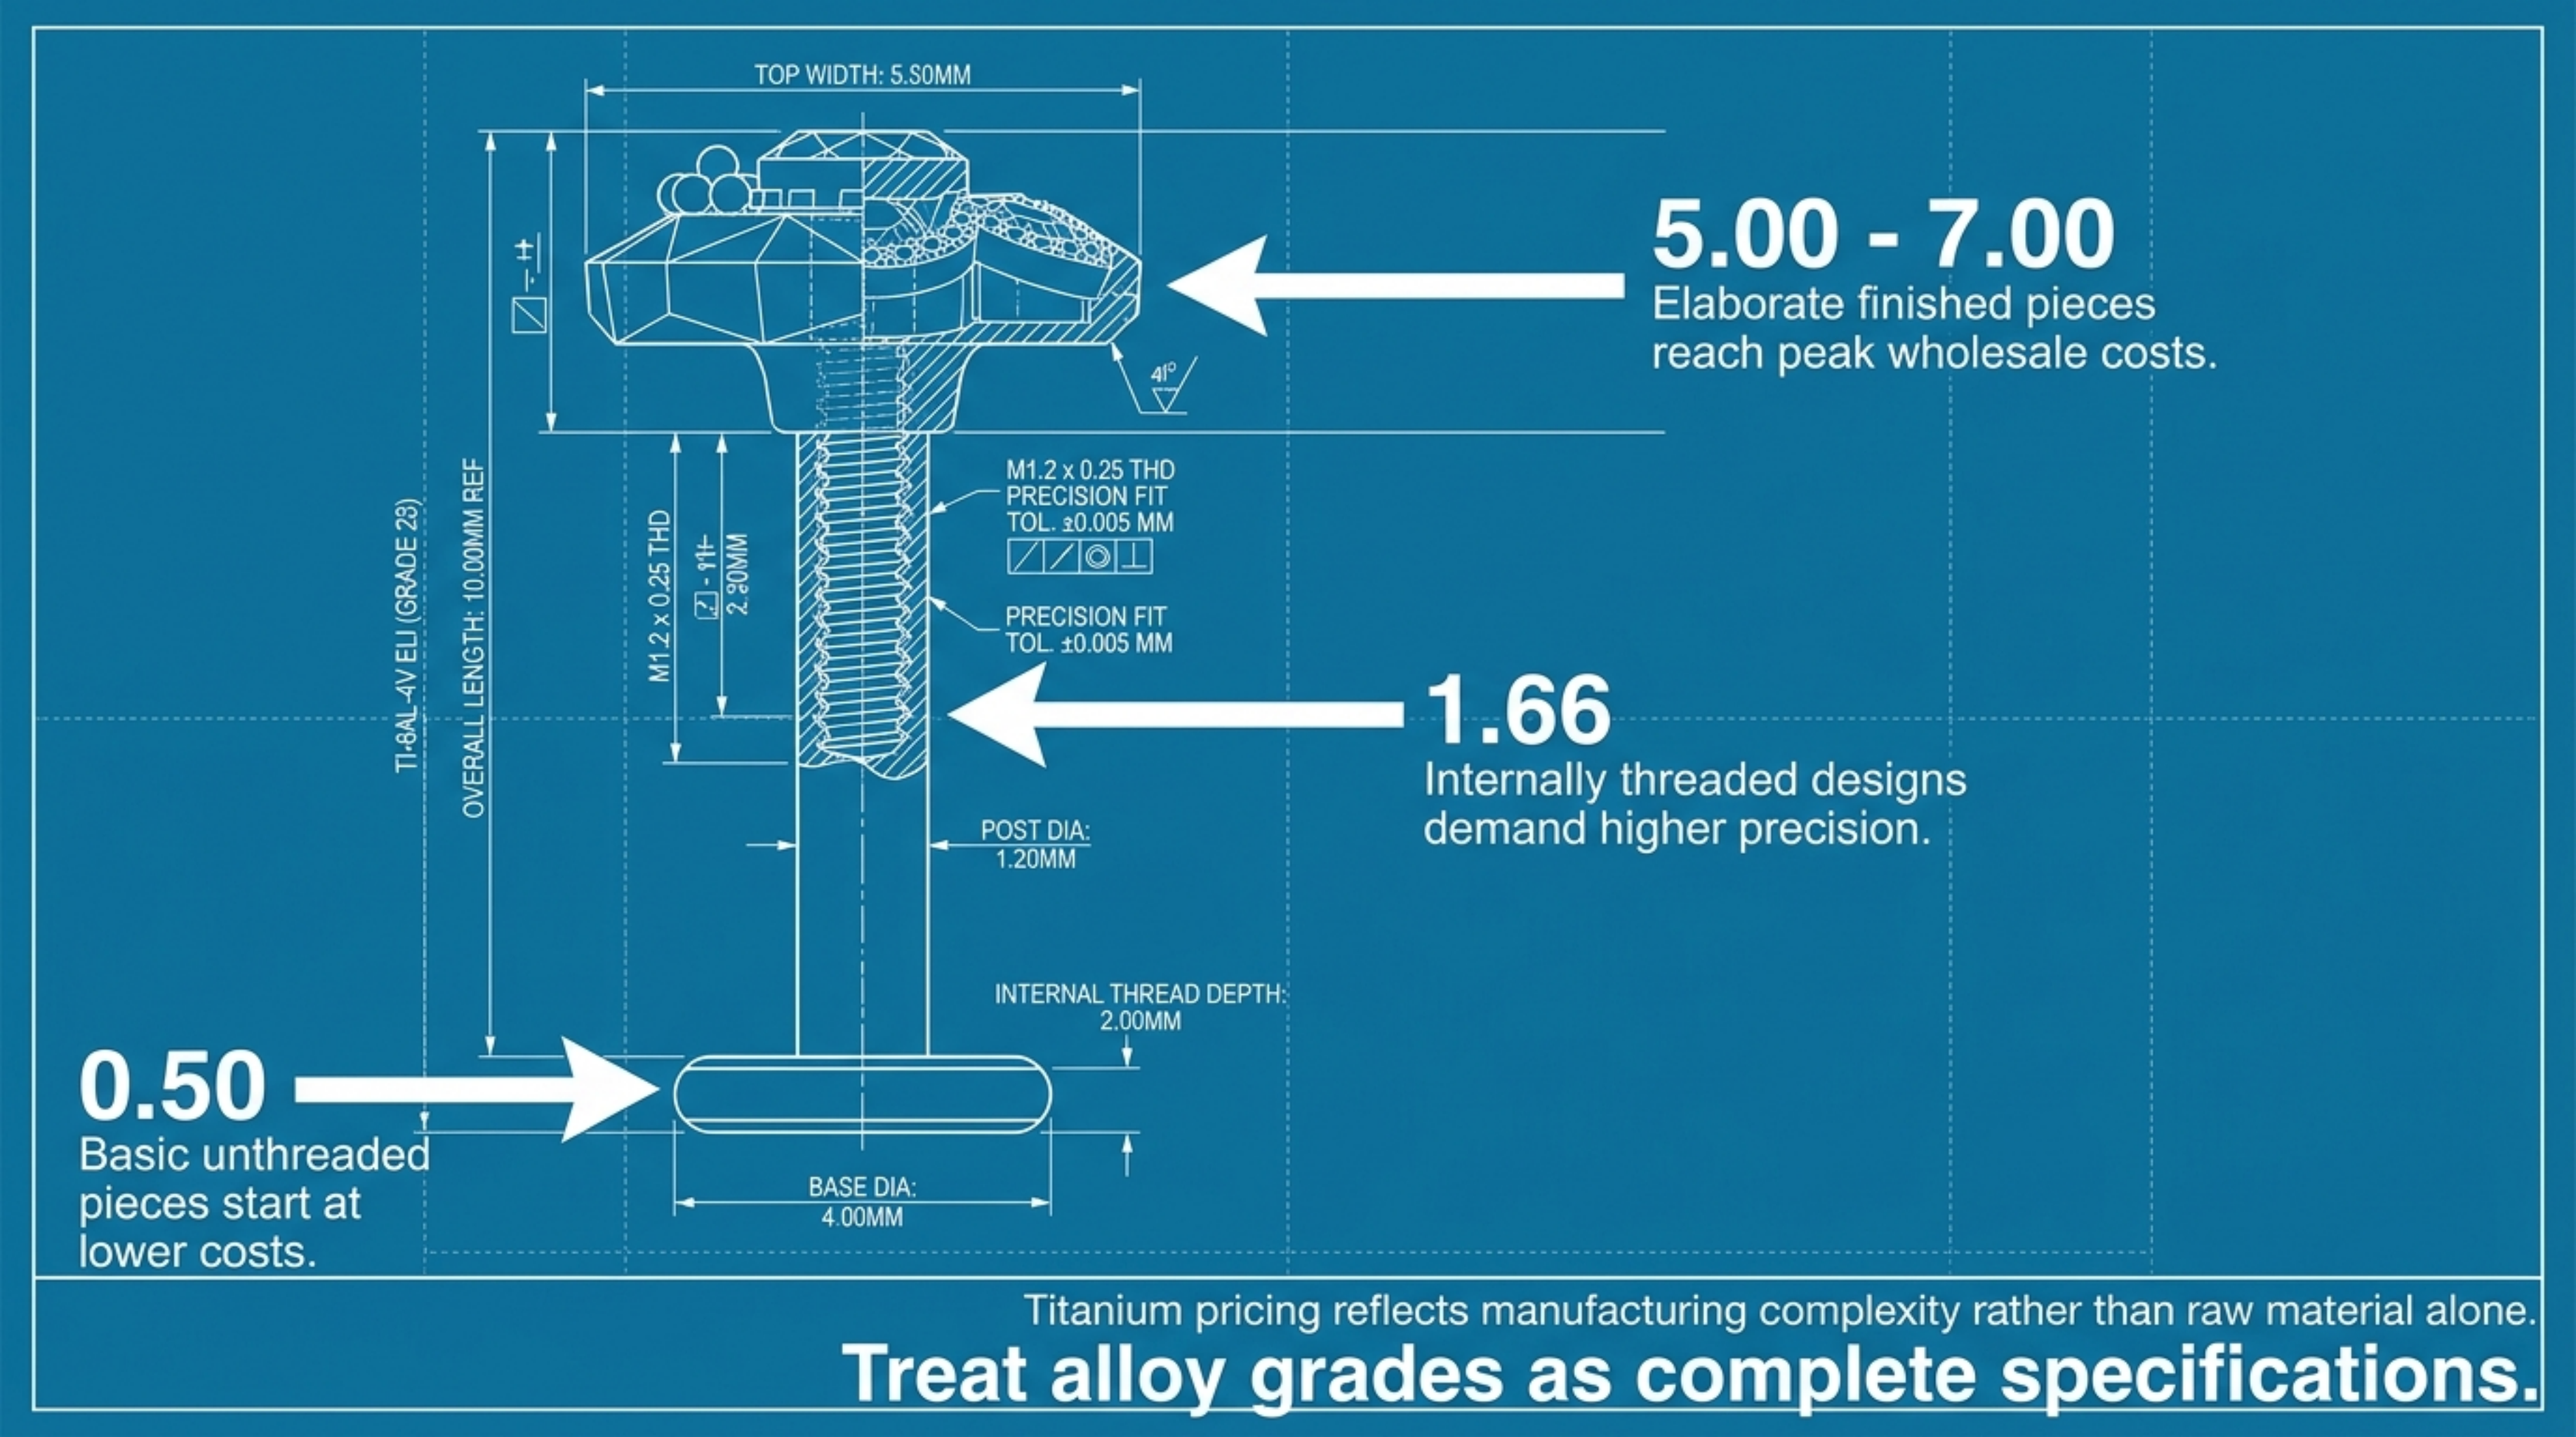

TOP WIDTH: 5.50MM
41°
M1.2 x 0.25 THD
PRECISION FIT
TOL. ±0.005 MM
PRECISION FIT
TOL. ±0.005 MM
M1.2 x 0.25 THD
2.80MM
OVERALL LENGTH: 10.00MM REF
TI-6AL-4V ELI (GRADE 23)
POST DIA:
1.20MM
INTERNAL THREAD DEPTH:
2.00MM
BASE DIA:
4.00MM
5.00 - 7.00
Elaborate finished pieces
reach peak wholesale costs.
1.66
Internally threaded designs
demand higher precision.
0.50
Basic unthreaded
pieces start at
lower costs.
Titanium pricing reflects manufacturing complexity rather than raw material alone.
Treat alloy grades as complete specifications.